

# μPELT-ts PELT® Gauge (PELT-uPts3H)

## Multi-Layer Ultrasonic Thickness Gauge

### BENEFITS

- Up to 3 layers from one measurement
- Non-destructive measurements of thick, soft or attenuative coatings on any substrate
- Measures coatings on textured or grit-blasted substrates
- Thickness verification and Process Control of complex coatings

### FEATURES


- USB Interface
- Color Touch-screen display
- Smaller and Lighter than μP301HE
- Improved Gauge Precision (R&R results) and Excellent Accuracy
- Compatible with μPELT Calibrations & Jobs



### PELT-uPts3H

The μPELT-ts model PELT-uPts3H PELT gauge is a precise, multi-layer ultrasonic coating thickness gauge. PELT gauges use advanced ultrasonic technology to achieve excellent measurement accuracy, repeatability and reproducibility. The PELT-uPts3H hand-held portable gauge allows monitoring in any production environment. The supplied Windows application software manages data transfer and automated ultrasonic waveform analysis (Autogauge2 Algorithms).

PELT gauges readily monitor both coating thickness and uniformity to verify that all coating layers are within specification. Ease of measurement allows the user to measure more point locations per part and increases the number of parts that can be measured for improved process control.

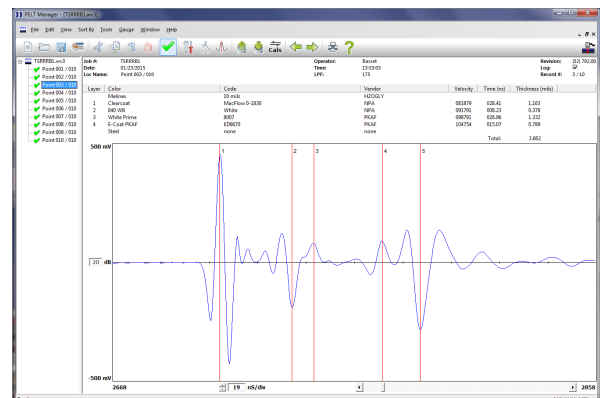

### PELTManager™ host PC software (included)

The PELT Manager Windows® application provides a powerful and easy to use interface for μPELT-ts gauges. Calibration information and measurement data can easily be transferred to and from the gauge. Automated ultrasonic waveform analysis is performed by updated Autogauge2 algorithms.

## Measurement Specifications

### Measurement Method

Contact ultrasonic (ASTM standard E797-95)

### Couplant

Application dependent, usually water

### Max. Layers

Three (3)

### Calibrated Accuracy

$\pm 1.3$  microns ( $\pm 0.05$  mils) or  $\pm 2\%$  of the coating thickness, whichever is greater

### Resolution \*

0.5 to 0.33 micron (0.02 to 0.013 mils)

### Minimum Layer Thickness \*

Mid coatings: 15 microns (0.015 mm, 0.6 mils)  
Single coatings: 15 microns (0.015 mm, 0.6 mils)  
Top coatings: 25 microns (0.025 mm, 1.0 mils)

### Maximum Thickness (Total Coatings) \*\*

Standard transducer: 10 mm (0.40 in.)  
Optional transducer: 15 mm (0.60 in.)

### Measurement Units

Selectable: Metric (microns) / English (mils)

### Gauge Repeatability and Reproducibility (% R & R) \*\*

< 10% for solvent and waterborne coatings with typical process variation (Varies by layer)

### Supported transducers

Contact or Contact Delay Line

### Minimum radius of curvature of measurement surface

Using standard transducer:  
Convex surface: > 50.8 mm (2.0") radius  
Concave surface: > 152.4 mm (6.0") radius



Imaginant Inc.  
3800 Monroe Ave.  
Pittsford, NY 14534 USA  
Tel. +1 585 264 0480 Fax +1 585 264 9642  
www.imaginant.com  
E-mail: peltsales@imaginant.com

## Device Specifications

### Data Storage

Non-volatile storage for data and calibrations  
Storage for >10k measurement points

### Power

3.6V Li Ion rechargeable battery (2 included)  
8 hour shift on one battery, (3 hour recharge)  
100-240V; 50-60Hz 5VDC external AC  
Adapter (included)  
[Also charges the battery in the gauge]

### Dimensions

175mm x 150mm x 55mm (6.9" x 5.9" x 2.2")  
Weight: 1.18Kg (2.6 lbs) with battery

### Environmental

Operating Temp: 0° C to 40° C  
Humidity: < 80% at all times

### Housing

Extruded aluminum – powder coated  
Protective films included (screen & body)

### Acceleration / Shock

Operational after 11 mins. of 10-500Hz,  
1g. sinusoidal vibration  
Operational after single 11-ms. shock of 30g

## Software Requirements

### Operating System

Microsoft® Windows 7 and 10


## Thickness Data Reporting

### Measurement Data Format

Delimited ASCII files generated by PELT  
Manager™ software

### Reporting Software

Optional: Custom job/part silhouettes  
Depicts 1 layer per sheet  
(Microsoft Excel® required)

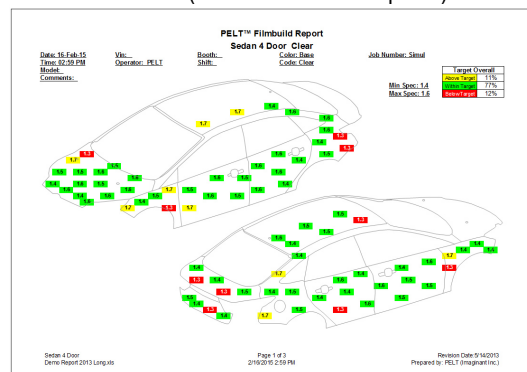

\* Minimum thickness and resolution are typical, based on: solvent, water-borne and powder paint coatings.

\*\* Material dependent, value based on non-metallic example. Specifications are subject to change without notice.